

# Slider Type/Ball Bushing Bearing

## **CY1L Series**

ø6, ø10, ø15, ø20, ø25, ø32, ø40







# CY1L Series Model Selection

E: Kinetic energy of load (J)

$$E = \frac{W}{2} \cdot \left( \frac{V}{1000} \right)^2$$

Es: Allowable kinetic energy for intermediate stop using an air pressure circuit (J)

Ps: Operating pressure limit for intermediate stop using an external stopper, etc. (MPa)

Pv: Maximum operating pressure for vertical operation (MPa)

W<sub>A</sub>: Allowable load mass based on these operating conditions (kg)

W<sub>v</sub>: Allowable load mass for vertical operation (kg)


F<sub>A</sub>: Allowable drive resisting force at pusher (kg)

σ: Stroke coefficient

$$\sigma = \frac{\text{Load mass in stroke}}{\text{Maximum load mass}}$$

**Operating Conditions**

- W: Load mass (kg)
- P: Operating pressure (MPa)
- L<sub>o</sub>: Distance from slide block mounting surface to workpiece center of gravity (cm)
- Mode of operation (Horizontal, Inclined, Vertical)
- F: Drive resisting force (kg)
- V: Speed (mm/s)
- Stroke (mm)

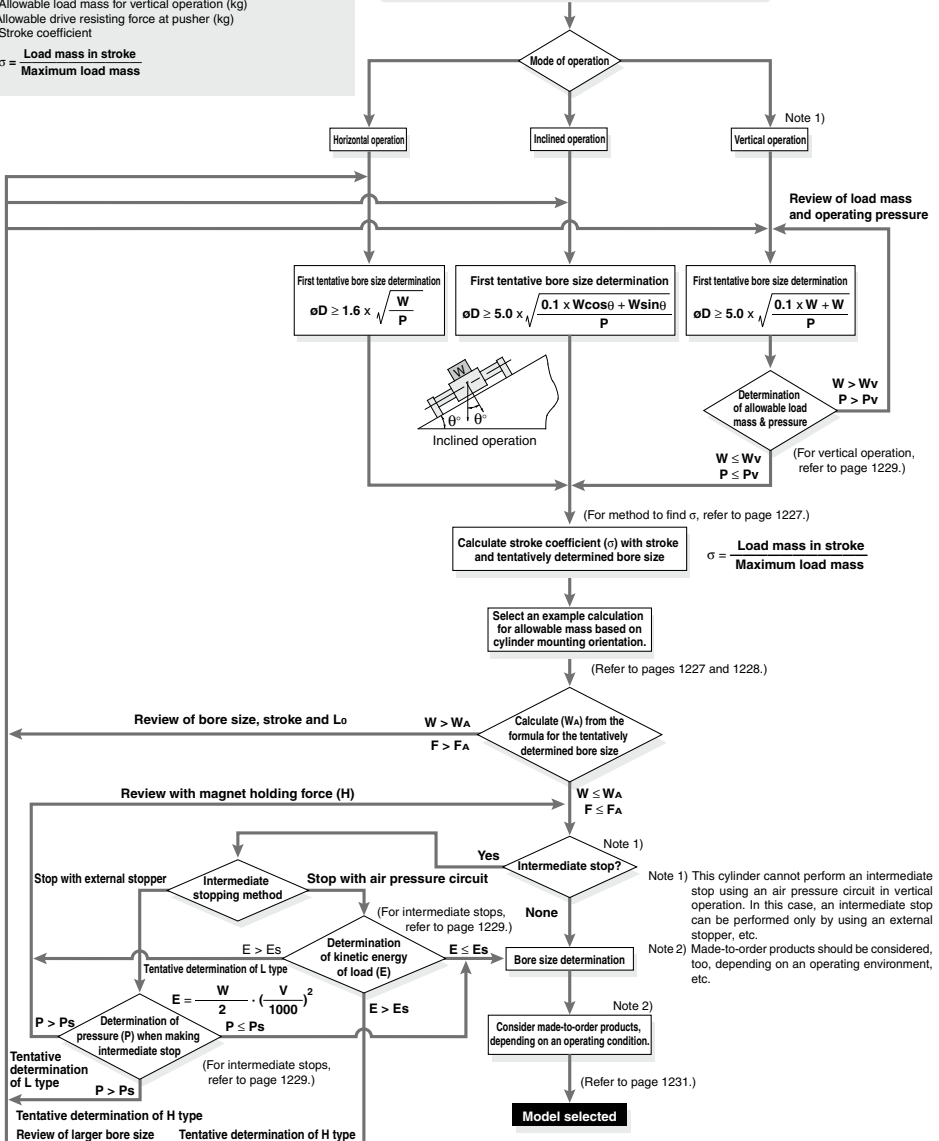

## Caution on Design (1)

### How to Find $\sigma$ when Selecting the Allowable Load Mass

Since the maximum load mass with respect to the cylinder stroke changes as shown in the table below,  $\sigma$  should be considered as a coefficient determined in accordance with each stroke.

Example) CY1L25□-650

- (1) Maximum load mass = 20 kg
- (2) Load mass for 650 st = 13.6 kg
- (3)  $\sigma = \frac{13.6}{20} = 0.68$  is the result.

### Calculation Formula for $\sigma$ ( $\sigma \leq 1$ )


ST: Stroke (mm)

Model	CY1L6	CY1L10	CY1L15
$\sigma =$	1	$\frac{10^{(0.88 - 1.3 \times 10^{-3} \times ST)}}{3}$	$\frac{10^{(1.5 - 1.3 \times 10^{-3} \times ST)}}{7}$

Model	CY1L20	CY1L25	CY1L32
$\sigma =$	$\frac{10^{(1.71 - 1.3 \times 10^{-3} \times ST)}}{12}$	$\frac{10^{(1.98 - 1.3 \times 10^{-3} \times ST)}}{20}$	$\frac{10^{(2.26 - 1.3 \times 10^{-3} \times ST)}}{30}$


Model	CY1L40
$\sigma =$	$\frac{10^{(2.48 - 1.3 \times 10^{-3} \times ST)}}{50}$

Note) Calculate with  $\sigma = 1$  for all applications up to  $\phi 10 - 300$  mmST,  $\phi 15 - 500$  mmST,  $\phi 20 - 500$  mmST,  $\phi 25 - 500$  mmST,  $\phi 32 - 600$  mmST and  $\phi 40 - 600$  mmST.

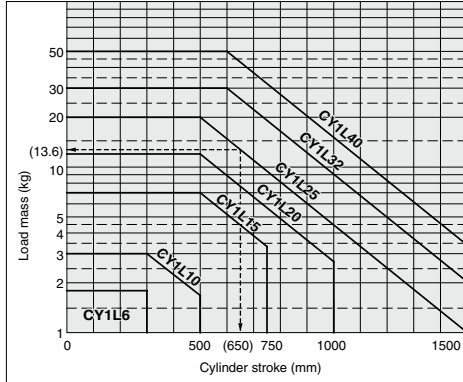

### Examples of Allowable Load Mass Calculation Based on Cylinder Mounting Orientation

#### 1. Horizontal Operation (Floor mounting)




Maximum Load Mass (Center of slide block) (kg)	6	10	15	20	25	32	40
Bore size (mm)	6	10	15	20	25	32	40
Max. load mass (kg)	1.8	3	7	12	20	30	50
Stroke (Max)	Up to 300 st	Up to 300 st	Up to 500 st	Up to 500 st	Up to 500 st	Up to 600 st	Up to 600 st

The above maximum load mass values will change with the stroke length for each cylinder size, due to limitation from warping of the guide shafts. (Take note of the coefficient  $\sigma$ .)

Moreover, depending on the operating direction, the allowable load mass may be different from the maximum load mass.


#### 2. Horizontal Operation (Wall mounting)

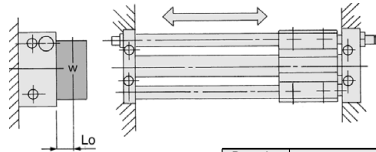

Lo: Distance from mounting surface to load center of gravity (cm)

Bore size (mm)	Allowable load mass (W <sub>A</sub> ) (kg)
6	$\sigma \cdot 6.48 - 6.8 + 2Lo$
10	$\sigma \cdot 15.0 - 8.9 + 2Lo$
15	$\sigma \cdot 45.5 - 11.3 + 2Lo$
20	$\sigma \cdot 101 - 13.6 + 2Lo$
25	$\sigma \cdot 180 - 15.2 + 2Lo$
32	$\sigma \cdot 330 - 18.9 + 2Lo$
40	$\sigma \cdot 624 - 22.5 + 2Lo$

#### 3. Vertical Operation



Bore size (mm)	Allowable load mass (W <sub>V</sub> ) (kg)
6	$\sigma \cdot 1.53 - 1.6 + Lo$
10	$\sigma \cdot 5.00 - 1.95 + Lo$
15	$\sigma \cdot 15.96 - 2.4 + Lo$
20	$\sigma \cdot 31.1 - 2.8 + Lo$
25	$\sigma \cdot 54.48 - 3.1 + Lo$
32	$\sigma \cdot 112.57 - 3.95 + Lo$
40	$\sigma \cdot 212.09 - 4.75 + Lo$


Lo: Distance from mounting surface to load center of gravity (cm)

Note) Operating pressure should be equal to or less than the maximum operating pressure in the article, "Vertical Operation" listed on page 1229.

## Caution on Design (2)

### Example of Allowable Load Mass Calculation Based on Cylinder Mounting Orientation

#### 4. Inclined Operation (In operating direction)




Angle	up to 45°	up to 60°	up to 75°	up to 90°
k	1	0.9	0.8	0.7

Angle coefficient (k) : k = [to 45° (= θ)] = 1,  
[to 60°] = 0.9, [to 75°] = 0.8,  
[to 90°] = 0.7

Lo: Distance from mounting surface to load center of gravity (cm)

Bore size (mm)	Allowable load mass (W <sub>A</sub> ) (kg)
6	$\sigma$ 4.05-K
	$1.7 \cos \theta + 2 (1.6 + Lo) \sin \theta$
10	$\sigma$ 10.2-K
	$2.8 \cos \theta + 2 (1.95 + Lo) \sin \theta$
15	$\sigma$ 31.1-K
	$2.9 \cos \theta + 2 (2.4 + Lo) \sin \theta$
20	$\sigma$ 86.4-K
	$6 \cos \theta + 2 (2.8 + Lo) \sin \theta$
25	$\sigma$ 105.4-K
	$3.55 \cos \theta + 2 (3.1 + Lo) \sin \theta$
32	$\sigma$ 178-K
	$4 \cos \theta + 2 (3.95 + Lo) \sin \theta$
40	$\sigma$ 361.9-K
	$5.7 \cos \theta + 2 (4.75 + Lo) \sin \theta$


#### 5. Inclined Operation (At a right angle to operating direction)

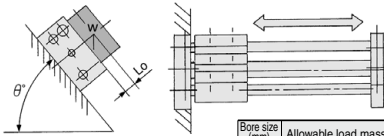

Lo: Distance from mounting surface to load center of gravity (cm)

Bore size (mm)	Allowable load mass (W <sub>A</sub> ) (kg)
6	$\sigma$ 6.48
	$3.6 + 2 (1.6 + Lo) \sin \theta$
10	$\sigma$ 15
	$5 + 2 (1.95 + Lo) \sin \theta$
15	$\sigma$ 45.5
	$6.5 + 2 (2.4 + Lo) \sin \theta$
20	$\sigma$ 115
	$8 + 2 (2.8 + Lo) \sin \theta$
25	$\sigma$ 180
	$9 + 2 (3.1 + Lo) \sin \theta$
32	$\sigma$ 330
	$11 + 2 (3.95 + Lo) \sin \theta$
40	$\sigma$ 624
	$13 + 2 (4.75 + Lo) \sin \theta$


#### 6. Load Center Offset in Operating Direction (Lo)



Lo: Distance from center of slide block to load's center of gravity (cm)

Bore size (mm)	Allowable load mass (W <sub>A</sub> ) (kg)
6	$\sigma$ 2
	$Lo + 1.7$
10	$\sigma$ 5.6
	$Lo + 2.8$
15	$\sigma$ 13.34
	$Lo + 2.9$
20	$\sigma$ 43.2
	$Lo + 6$
25	$\sigma$ 46.15
	$Lo + 3.55$
32	$\sigma$ 80
	$Lo + 4$
40	$\sigma$ 188.1
	$Lo + 5.7$


#### 7. Horizontal Operation (Pushing load, Pusher)

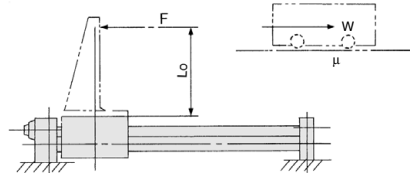

F: Drive (from slide block to position Lo) resistance force  $W \times \mu$  (kg)  
Lo: Distance from mounting surface to load center of gravity (cm)  
 $\mu$ : Friction coefficient

Bore size (mm)	6	10	15	20
Allowable drive resisting force (F <sub>A</sub> ) (kg)	$\frac{\sigma}{1.6 + Lo}$ 2.72	$\frac{\sigma}{1.95 + Lo}$ 5.55	$\frac{\sigma}{2.4 + Lo}$ 15.96	$\frac{\sigma}{2.8 + Lo}$ 41.7
Bore size (mm)	25	32	40	
Allowable drive resisting force (F <sub>A</sub> ) (kg)	$\frac{\sigma}{3.1 + Lo}$ 58.9	$\frac{\sigma}{3.95 + Lo}$ 106.65	$\frac{\sigma}{4.75 + Lo}$ 228	

#### 8. Horizontal Operation (Load, Lateral offset Lo)

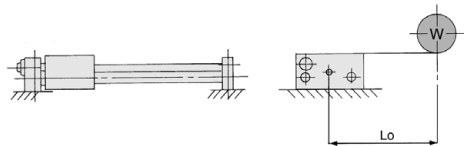

Lo: Distance from center of side block to load's center of gravity (cm)

Bore size (mm)	6	10	15	20
Allowable load mass (W <sub>A</sub> ) (kg)	$\frac{\sigma}{3.6 + Lo}$ 6.48	$\frac{\sigma}{5 + Lo}$ 15	$\frac{\sigma}{6.5 + Lo}$ 45.5	$\frac{\sigma}{8 + Lo}$ 80.7
Bore size (mm)	25	32	40	
Allowable load mass (W <sub>A</sub> ) (kg)	$\frac{\sigma}{9 + Lo}$ 144	$\frac{\sigma}{11 + Lo}$ 275	$\frac{\sigma}{13 + Lo}$ 520	

**Caution on Design (3)**

**Vertical Operation**

When operating a load vertically, it should be operated within the allowable load mass and maximum operating pressures shown in the table below. Use caution, as operating above the prescribed values may lead to dropping of the load.

When the cylinder is mounted vertically or sidelong, sliders may move downwards due to the self-weight or workpiece mass. If an accurate stopping position is required at the stroke end or the middle-stroke, use an external stopper to secure accurate positioning.

Bore size (mm)	Model	Allowable load mass (Wv) (kg)	Maximum operating pressure (Pv) (MPa)
6	CY1L 6H	1.0	0.55
10	CY1L10H	2.7	0.55
15	CY1L15H	7.0	0.65
	CY1L15L	4.1	0.40
20	CY1L20H	11.0	0.65
	CY1L20L	7.0	0.40
25	CY1L25H	18.5	0.65
	CY1L25L	11.2	0.40
32	CY1L32H	30.0	0.65
	CY1L32L	18.2	0.40
40	CY1L40H	47.0	0.65
	CY1L40L	29.0	0.40

Note 1) Use caution, since the magnetic coupling may be dislocated if it is used over the maximum operating pressure.

Note 2) Allowable load mass above indicates the maximum load mass when loaded. The actual loadable mass must be determined referring to the flow chart in the Model Selection 1.

**Intermediate Stop**

**1. Intermediate stopping of load with an external stopper, etc.**

When stopping a load in mid-stroke using an external stopper (adjusting bolt, etc.), operate within the operating pressure limits shown in the table below. Use caution, as operation at a pressure exceeding these limits can result in breaking of the magnetic coupling.

Bore size (mm)	Model	Operating pressure limit for intermediate stop (Ps) (MPa)
6	CY1L 6H	0.55
10	CY1L10H	0.55
15	CY1L15H	0.65
	CY1L15L	0.40
20	CY1L20H	0.65
	CY1L20L	0.40
25	CY1L25H	0.65
	CY1L25L	0.40
32	CY1L32H	0.65
	CY1L32L	0.40
40	CY1L40H	0.65
	CY1L40L	0.40

**2. Intermediate stopping of load with an air pressure circuit**

When stopping a load using an air pressure circuit, operate at or below the kinetic energy shown in the table below. Use caution, as operation when exceeding the allowable value can result in breaking of the magnetic coupling.


(Reference values)

Bore size (mm)	Model	Allowable kinetic energy for intermediate stop (Es) (J)
6	CY1L 6H	0.007
10	CY1L10H	0.03
15	CY1L15H	0.13
	CY1L15L	0.076
20	CY1L20H	0.24
	CY1L20L	0.16
25	CY1L25H	0.45
	CY1L25L	0.27
32	CY1L32H	0.88
	CY1L32L	0.53
40	CY1L40H	1.53
	CY1L40L	0.95

# Magnetically Coupled Rodless Cylinder Slider Type: Ball Bushing Bearing

## CY1L Series

ø6, ø10, ø15, ø20, ø25, ø32, ø40



### How to Order

Ball Bushing Bearing **CY1L 25** **H** - **300** - **J79W** -

Slider type  
(Ball bushing bearing)

Bore size

6	6 mm	25	25 mm
10	10 mm	32	32 mm
15	15 mm	40	40 mm
20	20 mm		

Port thread type

Symbol	Type	Bore size
Nil	M thread	ø6, ø10, ø15
	Rc	ø20, ø25, ø32, ø40
TN	NPT	ø32, ø40
TF	G	

Magnetic holding force

Refer to page 1231 for specifications.

Standard stroke

Refer to "Standard Stroke" on page 1231.

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	--

\* For the applicable auto switch model, refer to the table below.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Adjustment type

Nil	With adjusting bolt
B	With shock absorbers (2 pcs.)
BS	With shock absorber (With plate A) * Installed on side A at time of shipment.

Shock Absorbers

Type	Bore size (mm)				
	6	10, 15	20	25	32, 40
Standard (shock absorber RB series)	RB0805		RB1006	RB1411	RB2015
Shock absorber soft type RJ series type (-XB22)	RJ0805	RJ0806H	RJ1007H	RJ1412H	—

\* The shock absorber service life is different from that of the CY1L cylinder.

Refer to "Specific Product Precautions" for each shock absorber for the replacement period.

\* The shock absorber soft type RJ series type (-XB22) is a made to order specification. For details, refer to page 1468.

Applicable Auto Switches/Refer to pages 1289 to 1383 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m) *				Pre-wired connector	Applicable load	
					DC	AC	Perpendicular	In-line	0.5 (Nil)	3 (L)	5 (Z)	None (N)			
									●	●	○	—			
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	F7NV	F79	●	●	○	—	○	IC circuit	
				3-wire (PNP)					12 V	●	●	○	—		○
		Connector		2-wire	24 V		—	●		●	●	●	—		—
	Diagnostic indication (2-color indicator)	Grommet		3-wire (NPN)	5 V, 12 V		F7NWC	F79W	●	●	○	—	○		IC circuit
				3-wire (PNP)	12 V		—	F7PW	●	●	○	—	○		—
		Water resistant (2-color indicator)		Grommet	2-wire		12 V	F7BWC	F79W	●	●	○	—		○
			4-wire (NPN)		5 V, 12 V		—	F79F	●	●	○	—	○		IC circuit
Read auto switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A76H	●	●	—	—	—	IC circuit	
				2-wire	—	200 V	A72H	●	●	—	—	—	—		
					12 V	100 V	A73	A73H	●	●	●	—	—	—	
		Connector		No	24 V	5 V, 12 V	100 V or less	A80	A80H	●	●	—	—	IC circuit	
					12 V	—	A73C	—	●	●	●	—	—	—	
			No	5 V, 12 V	—	A80C	—	●	●	●	—	IC circuit			

\*\* Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

\* Lead wire length symbols: 0.5 m..... Nil (Example) J79W  
3 m..... L (Example) J79WL  
5 m..... Z (Example) J79WZ  
None..... N (Example) J79CN

\* Solid state auto switches marked with "○" are produced upon receipt of order.

- Since there are other applicable auto switches than listed, refer to page 1234 for details.
- For details about auto switches with pre-wired connector, refer to pages 1358 and 1359.
- Auto switches are shipped together, (but not assembled).



## Specifications

### Symbol

Rubber bumper  
(Magnet type)



### Easy piping and wiring

Hollow shafts are used, and centralization of ports on one side makes piping easy. Auto switches can be mounted through the use of special switch rails.

### Shock absorbers and adjusting bolt are standard equipment

Impacts at stroke end due to high speed use can be absorbed, and fine adjustment of the stroke is possible.



**Made to Order: Individual Specifications**  
(For details, refer to pages 1252 and 1253.)

Symbol	Specifications
-X116	Hydro specifications
-X168	Helical insert thread specifications
-X322	Outside of cylinder tube with hard chrome plated
-X431	Auto switch rails on both side faces (with 2 pcs.)


### Made to Order Specifications

[Click here for details](#)

Symbol	Specifications
-XB9	Low speed cylinder (15 to 50 mm/s)
-XB13	Low speed cylinder (7 to 50 mm/s)
-XB22	Shock absorber soft type RJ series type

### Amount of Adjustment by Adjusting Bolt

#### CY1L



Bore size (mm)	Amount of adjustment by adjusting bolt: R (mm)	
	Single side	Both sides
6	6	12
10	5.5	11
15	3.5	7
20	5.5	11
25	5	10
32	5.5	11
40	4.5	9

- \* Since the cylinder is in an intermediate stop condition when stroke adjustment is performed, use caution regarding the operating pressure and the kinetic energy of the load.
- \* The amount of adjustment for adjustment bolts is the total amount when adjusted on both plate ends. For the adjustment on a single plate end, the amount of adjustment is half of the figures in the table above.
- \* Adjust the stroke adjustment with an adjustment bolt. It cannot be adjusted by a shock absorber.

Bore size (mm)	6	10	15	20	25	32	40	
Fluid	Air							
Proof pressure	1.05 MPa							
Maximum operating pressure	0.7 MPa							
Minimum operating pressure	0.18 MPa							
Ambient and fluid temperature	-10 to 60°C (No freezing)							
Piston speed *	50 to 500 mm/s							
Cushion	Rubber bumper/Shock absorber							
Lubrication	Not required (Non-lube)							
Stroke length tolerance (mm)	0 to 250 st: $^{+1.0}_0$ , 251 to 1000 st: $^{+1.4}_0$ , 1001 st and up: $^{+1.8}_0$							
Holding force (N)	Type H	19.6	53.9	137	231	363	588	922
	Type L	-	-	81.4	154	221	358	569
Standard equipment	Auto switch mounting rail							

\* In the case of setting an auto switch at the intermediate position, the maximum piston speed is subject to restrict for detection upon the response time of a load (Relays, Sequence controller, etc.).

### Standard Stroke

Bore size (mm)	Standard stroke (mm)	Maximum available stroke (mm)
6	50, 100, 150, 200	300
10	50, 100, 150, 200, 250, 300	500
15	50, 100, 150, 200, 250, 300, 350 400, 450, 500	750
20	100, 150, 200, 250, 300, 350 400, 450, 500, 600, 700, 800	1000
25		1500
32	100, 150, 200, 250, 300, 350 400, 450, 500, 600, 700, 800 900, 1000	1500
40		1500

Note) Intermediate stroke is available in 1 mm increments.

### Weight

Number of magnets	Bore size (mm)							(kg)
	6	10	15	20	25	32	40	
Basic weight	CY1L□H	0.324	0.580	1.10	1.85	2.21	4.36	4.83
	CY1L□L	—	—	1.02	1.66	2.04	4.18	4.61
Additional weight per each 50mm of stroke	0.044	0.077	0.104	0.138	0.172	0.267	0.406	

Calculation

(Example) CY1L32H-500

- Basic weight ..... 4.36 kg
- Additional weight ..... 0.267/50 st
- Cylinder stroke ..... 500 st

$$4.36 + 0.267 \times 500 \div 50 = 7.03 \text{ kg}$$

### Shock Absorber Specifications

Refer to the RB series in the [Web Catalog](#) for the details on shock absorbers.

Applicable rodless cylinder	6	CY1L20	CY1L25	CY1L32 40	
	CY1L10 15				
Shock absorber model	RB0805	RB1006	RB1411	RB2015	
Maximum energy absorption: (J)	0.98	3.92	14.7	58.8	
Stroke absorption: (mm)	5	6	11	15	
Collision speed: (m/s)	0.05 to 5				
Max. operating frequency: (cycle/min) *	80	70	45	25	
Ambient temperature range	-10 to 80 °C				
Spring force: (N)	Extended	1.96	4.22	6.86	8.34
	Retracted	3.83	6.18	15.3	20.50

\* It denotes the values at the maximum energy absorption per one cycle. Therefore, the operating frequency can be increased according to the energy absorption.


The shock absorber service life is different from that of the CY1L cylinder. Refer to the Specific Product Precautions for the replacement period.

# CY1L Series


## Construction

### Slider type/Ball bushing bearing

#### CY1L6

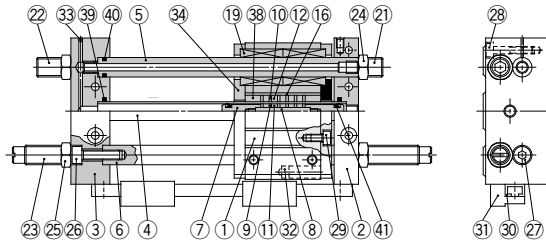

#### CY1L10 to 40

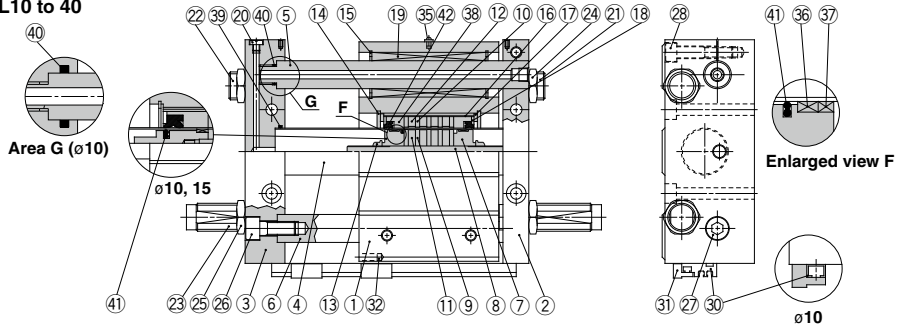

### Component Parts

No.	Description	Material	Note
1	Slide block	Aluminum alloy	Anodized
2	Plate A	Aluminum alloy	Anodized
3	Plate B	Aluminum alloy	Anodized
4	Cylinder tube	Stainless steel	
5	Guide shaft A	Carbon steel	Hard chrome plated
6	Guide shaft B	Carbon steel	Hard chrome plated
7	Piston	Aluminum alloy (Note 1)	Chromated
8	Shaft	Stainless steel	
9	Piston side yoke	Rolled steel	Zinc chromated
10	External slider side yoke	Rolled steel	Zinc chromated
11	Magnet A	—	
12	Magnet B	—	
13	Piston nut	Carbon steel	Zinc chromated ø25 to ø40
14	Retaining ring	Carbon tool steel	Phosphate coated
15	Retaining ring	Carbon tool steel	Phosphate coated
16	External slider tube	Aluminum alloy	
17	Slider spacer	Rolled steel	Nickel plated
18	Spacer	Rolled steel	Nickel plated
19	Ball bushing	—	
20	Plug	Brass	Nickel plated ø25 to ø40 only
21	Adjusting bolt A	Chromium molybdenum steel	Nickel plated
22	Adjusting bolt B	Chromium molybdenum steel	Nickel plated
23	Shock absorber	—	
24	Hexagon nut	Carbon steel	Nickel plated
25	Hexagon nut	Carbon steel	Nickel plated
26	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated
27	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated
28	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated

Note 1) Brass for ø6

No.	Description	Material	Note
29	Hexagon socket head cap screw	Chromium molybdenum steel	Nickel plated
30	Switch mounting rail	Aluminum alloy	
31	Auto switch	—	
32	Magnet for auto switch	—	
33	Steel ball	—	ø6, ø10, ø15 only
34	Side cover	Carbon steel	ø6 only
35	Grease cup	Carbon steel	ø15 or larger
36*	Wear ring A	Special resin	
37*	Wear ring	Special resin	
38*	Wear ring B	Special resin	
39*	Cylinder tube gasket	NBR	
40*	Guide shaft gasket	NBR	
41*	Piston seal	NBR	
42*	Scraper	NBR	

### Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Contents
6	CY1S6-PS-N	Set of nos. above 38, 39, 40, 41
10	CY1L10-PS-N	Set of nos. above 38, 39, 40, 41, 42
15	CY1L15-PS-N	Set of nos. above 36, 37, 38, 39, 40, 41, 42
20	CY1L20-PS-N	
25	CY1L25-PS-N	
32	CY1L32-PS-N	
40	CY1L40-PS-N	

Note 1) Seal kit includes 38, 39, 40, 41 for ø6, 36, 38 to 42 are for ø10, ø15.  
36 to 42 are for ø20 to ø40. Order the seal kit, based on each bore size.

Note 2) ø6: Same for CY1S6

Note 3) For bore size ø10, wear ring A cannot be replaced.

\* Seal kit includes a grease pack (ø6, ø10: 5 and 10 g, ø15 to ø40: 10 g).

Order with the following part number when only the grease pack is needed.

**Grease pack part no. for ø6, ø10: GR-F-005 (5 g) for external sliding parts,**


**GR-S-010 (10 g) for tube interior**

**Grease pack part no. for ø15 to ø40: GR-S-010 (10 g)**

**Dimensions**

**Slider type/Ball bushing bearing**

**CY1L6/10**

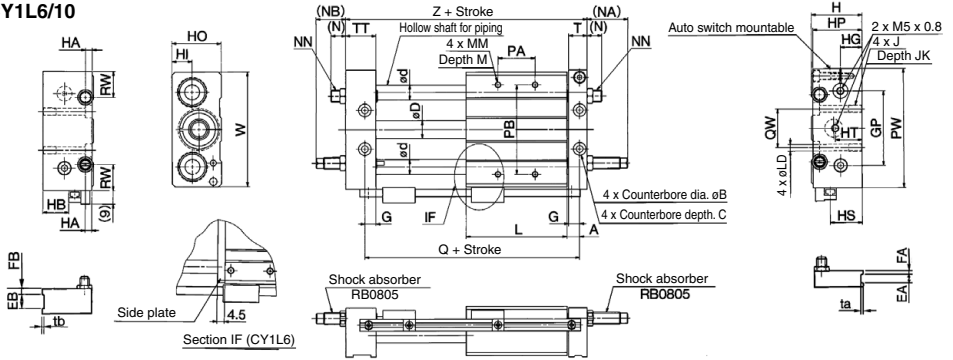


Model	A	B	C	D	d	EA	EB	FA	FB	G	GP	H	HA	HB	HG	HI	HO	HP	HS	HT	J	JK
<b>CY1L6</b>	7	6.5	3	7.6	8	—	—	—	6	36	27	5	10	11	9	25	26	14	16	M4 x 0.7	6.5	—
<b>CY1L10</b>	8.5	8	4	12	10	6	12	3	5	7.5	50	34	6	17.5	14.5	13.5	33	33	21.5	18	M5 x 0.8	9.5

Model	L	LD	M	MM	(N)	(NA)	(NB)	NN	PA*	PB	PW	Q	QW	RW	T	TT	ta	tb	W	Z
<b>CY1L6</b>	40	3.5	6	M4 x 0.7	11	30	24	M8 x 1.0	24	40	60	54	20	12	10	16	—	—	56	68
<b>CY1L10</b>	68	4.3	8	M4 x 0.7	10.5	27	19	M8 x 1.0	30	60	80	85	26	17.5	12.5	20.5	0.5	1.0	77	103

\* PA dimensions are for split from center.

**CY1L15/20/25/32/40**

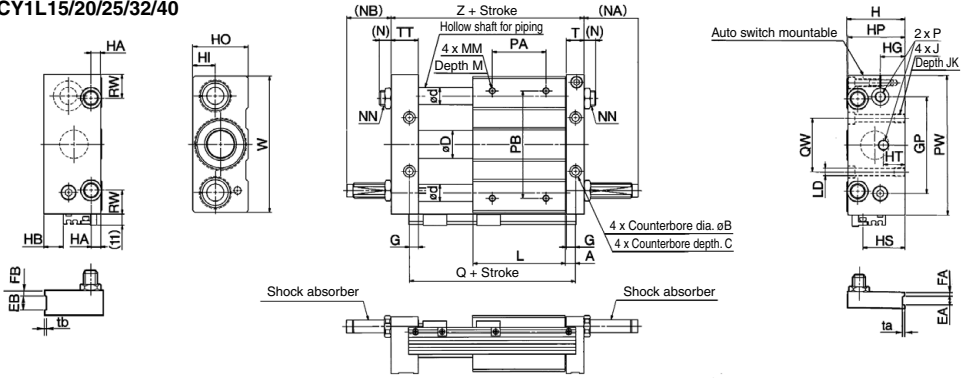


Model	A	B	C	D	d	EA	EB	FA	FB	G	GP	H	HA	HB	HG	HI	HO	HP	HS	HT	J	JK	L	LD	
<b>CY1L15</b>	7.5	9.5	5	16.6	12	6	13	3	6	6.5	65	40	6.5	4	16	14	38	39	25	16	M6 x 1.0	9.5	75	5.6	
<b>CY1L20</b>	9.5	9.5	5.2	21.6	16	—	—	—	8.5	80	46	9	10	18	16	44	45	31	20	—	M6 x 1.0	10	86	5.6	
<b>CY1L25</b>	9.5	11	6.5	26.4	16	8	14	4	7	8.5	90	54	9	18	23	21	52	53	39	20	M8 x 1.25	10	86	7	
<b>CY1L32</b>	10.5	14	8	33.6	20	8	16	5	7	9.5	110	66	12	26.5	26.5	64	64	47.5	25	—	M10 x 1.5	15	100	9.2	
<b>CY1L40</b>	11.5	14	8	41.6	25	10	20	5	10	10.5	130	78	12	35	30.5	28.5	76	74	56	30	—	M10 x 1.5	15	136	9.2

Model	M	MM	(N)	(NA)	(NB)	NN	P	PA*	PB	PW	Q	QW	RW	T	ta	tb	TT	W	Z	Shock absorber
<b>CY1L15</b>	8	M5 x 0.8	8.5	27	17	M8 x 1.0	M5 x 0.8	45	70	95	90	30	15	12.5	0.5	1.0	22.5	92	112	RB0805
<b>CY1L20</b>	10	M6 x 1.0	10.5	29	20	M10 x 1.0	Rc 1/8	50	90	120	105	40	28	16.5	—	—	25.5	117	130	RB1006
<b>CY1L25</b>	10	M6 x 1.0	12.5	49	40	M14 x 1.5	Rc 1/8	60	100	130	105	50	22	16.5	0.5	1.0	25.5	127	130	RB1411
<b>CY1L32</b>	12	M8 x 1.25	13.5	52	42	M20 x 1.5	Rc 1/8	70	120	160	121	60	33	18.5	0.5	1.0	28.5	157	149	RB2015
<b>CY1L40</b>	12	M8 x 1.25	12.5	51	36	M20 x 1.5	Rc 1/4	90	140	190	159	84	35	20.5	1.0	1.0	35.5	187	194	—

\* PA dimensions are for split from center.

# CY1L Series Auto Switch Mounting

## Proper Auto Switch Mounting Position (Detection at stroke end)

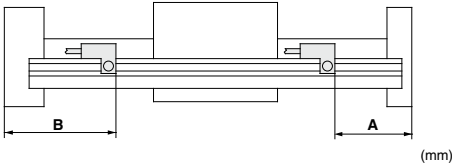


Bore size (mm)	Applicable auto switch					
	D-A73/A80		D-A72 D-A7□H/A80H D-A73□/A80C D-F7□/J79 D-F7□V/J79C D-F7□W/J79W D-F7□WV D-F7BA/F7BAV D-F79F		D-F7NT	
	A	B	A	B	A	B
6	23	45	23.5	44.5	28.5	39.5
10	58	45	58.5	44.5	63.5	39.5
15	65	47	65.5	46.5	70.5	41.5
20	76	54	76.5	53.5	81.5	48.5
25	76	54	76.5	53.5	81.5	48.5
32	92	57	92.5	56.5	97.5	51.5
40	130	64	130.5	63.5	135.5	58.5

Note 1) 50 mm is the minimum stroke available with 2 auto switches mounted.  
Note 2) Adjust the auto switch after confirming the operating conditions in the actual setting.

## Mounting of Auto Switch

When mounting an auto switch, the auto switch mounting screw should be screwed into a hexagon nut (M3 x 0.5) which has been inserted into the groove of the switch mounting rail. (Tightening torque: Approx. 0.5 to 0.7 N·m)

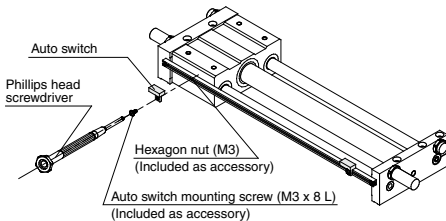

## Operating Range

Auto switch model	Bore size (mm)						
	6	10	15	20	25	32	40
D-A7□/A8□	6	6	6	6	6	6	6
D-F7□/J7□	3	3	4	3	3	3	3.5
D-F79F	4.5	4.5	4.5	4.5	4.5	4.5	4.5

\* Since this is a guideline including hysteresis, not meant to be guaranteed. (Assuming approximately ±30% dispersion)  
There may be the case it will vary substantially depending on an ambient environment.

Other than the models listed in "How to Order", the following auto switches are applicable.  
For detailed specifications, refer to page 1340.

Type	Model	Electrical entry (Fetching direction)	Features
Solid state auto switch	D-F7NT	Grommet (In-line)	With timer

\* With pre-wired connector is available for D-F7NT type, too.  
For details, refer to pages 1358 and 1359.



# CY1L Series Specific Product Precautions

Be sure to read this before handling the products. Refer to page 8 for safety instructions and pages 9 to 18 for actuator and auto switch precautions.

## Operation

### ⚠ Warning

1. **Be aware of the space between the plates and the slide block.**  
Take sufficient care to avoid getting your hands or fingers caught when the cylinder is operated.
2. **Do not apply a load to a cylinder which is greater than the allowable value stated in the “Model Selection” pages.**  
This may cause malfunctions.
3. **Do not use the cylinder in an environment where the cylinder is expose to moisture, adhesive foreign matter, dust or liquid such as water or cutting fluid.**  
Consider a special order product if the cylinder is to be used in an environment that deteriorates the lubrication of the cylinder sliding parts.
4. **When applying grease to the cylinder, use the grease that has already been applied to the product. Grease packs are available if needed.**

## Mounting

### ⚠ Caution

1. **Avoid operation with the external slider fixed to the mounting surface.**  
The cylinder should be operated with the plates fixed to the mounting surface.
2. **Make sure that the cylinder mounting surface is a flatness of 0.2 mm or less.**  
If the flatness of the cylinder mounting surface is not appropriate, 2 guide shafts may be twisted. This may adversely affect the operating conditions and shorten the service life due to the increase of sliding resistance and the early abrasion of bearings.  
The cylinder mounting surface must be a flatness of 0.2 mm or less, and the cylinder must be mounted as it smoothly operates through the full stroke at the minimum operating pressure (0.18 MPa or less).

## Service Life and Replacement Period of Shock Absorber

### ⚠ Caution

1. **Allowable operating cycle under the specifications set in this catalog is shown below.**  
1.2 million times RB08□□  
2 million times RB10□□ to RB2725  
(Note) Specified service life (suitable replacement period) is the value at room temperature (20 to 25°C).  
The period may vary depending on the temperature and other conditions. In some cases the absorber may need to be replaced before the allowable operating cycle above.

## Disassembly and Maintenance

### ⚠ Warning

1. **Use caution as the attractive power of the magnets is very strong.**  
When removing the external slider and piston slider from the cylinder tube for maintenance, etc., handle with caution, since the magnets installed in each slider have a very strong attractive force.

### ⚠ Caution

1. **Use caution when removing the external slider, as the piston slider will be directly attracted to it.**  
When removing the external slider or piston slider from the cylinder tube, first force the sliders out of their magnetically coupled positions, and then remove them individually when there is no longer any holding force. If they are removed while still magnetically coupled, they will be directly attracted to one another and will not come apart.
2. **Do not disassemble the magnetic components (piston slider, external slider).**  
This can cause a loss of holding force and malfunction.
3. **When disassembling to replace the seals and wear ring, refer to the separate disassembly instructions.**
4. **Use caution to the direction of the external slider and the piston slider.**  
Since the external slider and piston slider are directional for  $\phi 6$ ,  $\phi 10$  and holding force type L, refer to the figures below when performing disassembly or maintenance. Put the external slider and piston slider together, and insert the piston slider into the cylinder tube so that they will have the correct positional relationship as shown in Fig. (1). If they align as shown in Fig. (2), insert the piston slider after turning it around 180°. If the direction is not correct, it will be impossible to obtain the specified holding force.




Fig. (1) Correct position




Fig. (2) Incorrect position

Example of  $\phi 15$  with holding force type L



# Linear Guide Type

## *CY1H Series*

Single Axis Type:  $\varnothing 10$ ,  $\varnothing 15$ ,  $\varnothing 20$ ,  $\varnothing 25$ /Double Axis Type:  $\varnothing 25$ ,  $\varnothing 32$



# Related Products

## Deceleration Controller DAS Series


Click here for details



**2-speed control reduces cycle time**  
**Allows for the impact relaxation of the stroke end**


**Allows for the 2-speed control of cylinders**

The deceleration position (cushion timing) and 2nd speed (cushion intensity) can be adjusted.

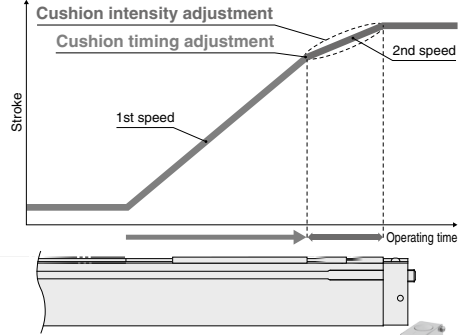


### Piping Example

For double-end

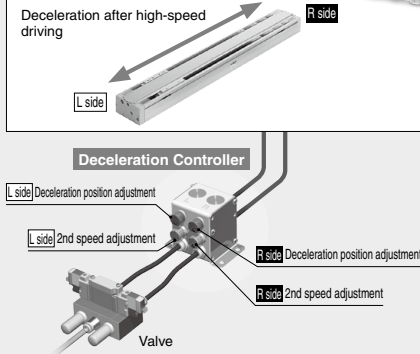


Air for adjusting the deceleration force position is supplied by drive air

- Deceleration position adjustment (Light blue)
- (Timing knob)
- 2nd speed adjustment (Gray)
- (2nd speed knob)




For single-end

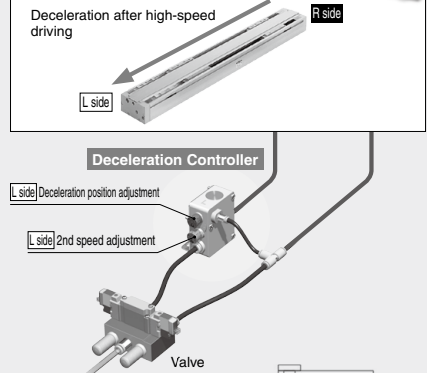

Air for adjusting the deceleration force position is supplied by drive air

- Deceleration position adjustment (Light blue)
- (Timing knob)
- 2nd speed adjustment (Gray)
- (2nd speed knob)



### Variations

Mounting	Body size	Applicable tubing O.D.								Bore size	
		Metric size				Inch size					
		4	6	8	10	12	5/32"	1/4"	5/16"	3/8"	1/2"
	5	●	●	●	●	●	●	●	●	●	●
	7	●	●	●	●	●	●	●	●	●	●
		ø10 to ø40									
		Up to ø100									





# CY1H Series Model Selection

E: Kinetic energy of load (J)

$$E = \frac{W}{2} \cdot \left( \frac{V}{1000} \right)^2$$

Es: Allowable kinetic energy for intermediate stop using an air pressure circuit (J)

Ps: Operating pressure limit for intermediate stop using an external stopper, etc. (MPa)

Pv: Maximum operating pressure for vertical operation (MPa)


Wv: Allowable load mass for vertical operation (kg)

$\alpha$ : Load factor

$$\sum \alpha = \frac{\text{Load mass (W)}}{\text{Max. load mass (Wmax)}} + \frac{\text{Static moment (M)}}{\text{Allowable static moment (Mmax)}} + \frac{\text{Dynamic moment (Me)}}{\text{Allowable dynamic moment (Memax)}}$$

## Operating Conditions

- W: Load mass (kg)
- V: Speed (mm/s)
- P: Operating pressure (MPa)
- Stroke (mm)
- Position of workpiece center of gravity (m)
- Mode of operation (Horizontal, Inclined, Vertical)

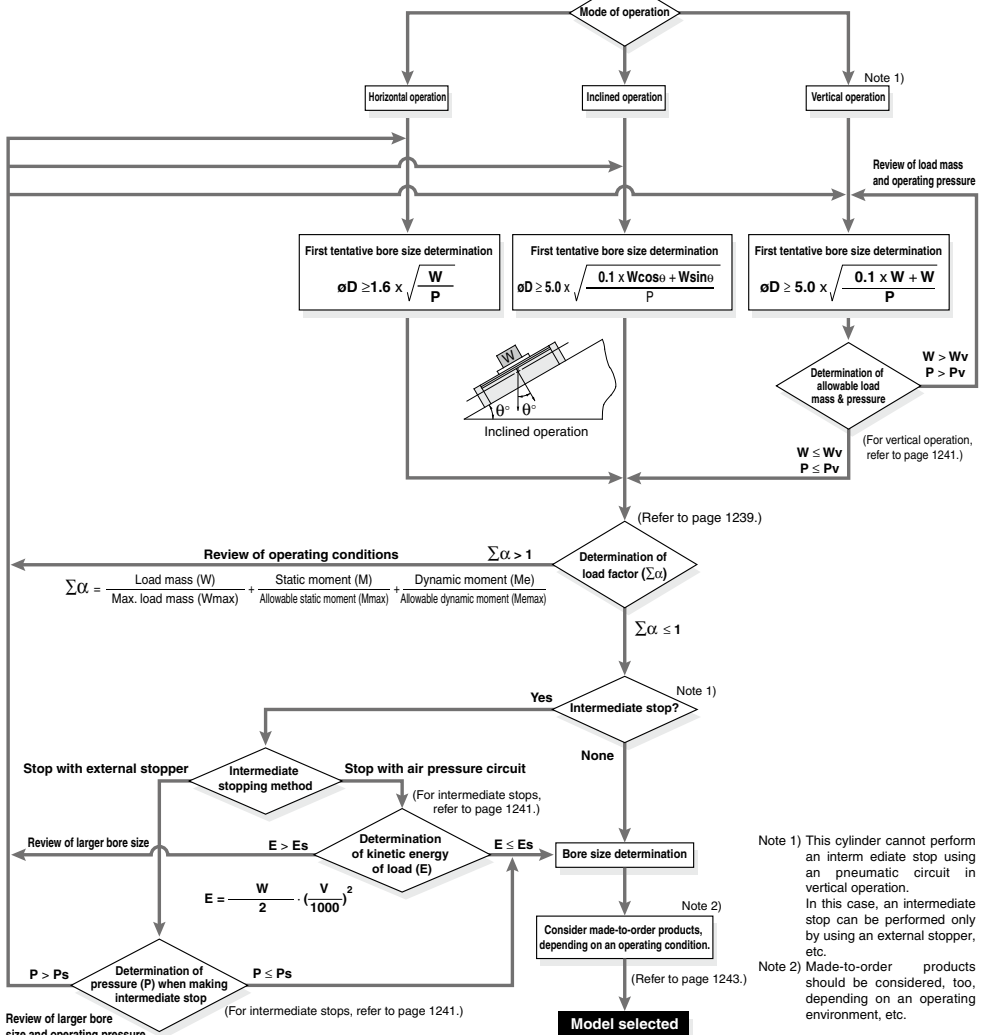

Note 1) This cylinder cannot perform an intermediate stop using an pneumatic circuit in vertical operation. In this case, an intermediate stop can be performed only by using an external stopper, etc.

Note 2) Made-to-order products should be considered, too, depending on an operating environment, etc.

Review of larger bore size and operating pressure

## Caution on Design (1)

The maximum load mass and allowable moment will differ depending on the workpiece mounting method, cylinder mounting orientation and piston speed. A determination of usability is performed based on the operating limit values in the graphs with respect to operating conditions, but the total ( $\Sigma \alpha n$ ) of the load factors ( $\alpha n$ ) for each mass and moment should not exceed 1.



$$\Sigma \alpha n = \frac{\text{Load mass (W)}}{\text{Maximum load mass (W max)}} + \frac{\text{Static moment (M)}}{\text{Allowable static moment (M max)}} + \frac{\text{Dynamic moment (Me)}}{\text{Allowable dynamic moment (Me max)}} \leq 1$$

Wmax, Mmax and Me max values are according to graph (1), (2) and (3) below.

## Load Mass

### Maximum Load Mass

Model	W <sub>max</sub> (kg)
CY1H10	4.0
CY1H15	9.0
CY1H20	16.0
CY1H25	25.0
CY1HT25	25.0
CY1HT32	40.0





Graph (1)

## Moment


### Allowable Moment

(Static moment/Dynamic moment) (N·m)

Model	M1	M2	M3	Model	M1	M2	M3
CY1H10	1.5	2.5	1.5	CY1H25	28	26	28
CY1H15	10	16	10	CY1HT25	56	85	56
CY1H20	13	16	13	CY1HT32	64	96	64



Graph (2)




Graph (3)

### Static Moment

Moment generated by the workpiece weight even when the cylinder is stopped


#### ■ Pitch moment

$$M_1 = W \cdot L$$




#### ■ Roll moment

$$M_2 = W \cdot L$$



#### ■ Yaw moment

$$M_3 = W \cdot (L - A)$$



(mm)

Model	A
CY1H10	15
CY1H15	17.5
CY1H20	19.5
CY1H25	23.5
CY1HT25	0*
CY1HT32	0*

\* Since there are 2 guides, the guides' central axis and the cylinder's central axis are the same.

### Dynamic Moment

Moment generated by the load equivalent to impact at the stroke end

$$We = \delta \cdot W \cdot V$$


$$V = 1.4 Va$$

**We**: Load equivalent to impact [N]  
 **$\delta$** : Bumper coefficient  
 With adjusting bolt (standard) = 4/100  
 With shock absorber = 1/100  
**W**: Load mass [kg]  
**V**: Collision speed [mm/s]  
**Va**: Average speed [mm/s]

#### ■ Pitch moment


$$Me_1 = 1/3 \cdot We \cdot L$$

\* Average load coefficient



#### ■ Yaw moment

$$Me_3 = 1/3 \cdot We \cdot (L - A)$$



(mm)

Model	A
CY1H10	15
CY1H15	17.5
CY1H20	19.5
CY1H25	23.5
CY1HT25	0*
CY1HT32	0*

\* Since there are 2 guides, the guides' central axis and the cylinder's central axis are the same.

# CY1H Series


## Selection Calculation

The selection calculation finds the load factors ( $\alpha_n$ ) of the items below, where the total ( $\Sigma\alpha_n$ ) does not exceed 1.

$$\Sigma\alpha_n = \alpha_1 + \alpha_2 + \alpha_3 \leq 1$$

Item	Load factor $\alpha_n$	Note
1. Max. load mass	$\alpha_1 = W/W_{max}$	Examine <b>W</b> . <b>W<sub>max</sub></b> is the max. load mass for <b>Va</b> .
2. Static moment	$\alpha_2 = M/M_{max}$	Examine <b>M1</b> , <b>M2</b> , <b>M3</b> . <b>M<sub>max</sub></b> is the allowable moment for <b>Va</b> .
3. Dynamic moment	$\alpha_3 = Me/Me_{max}$	Examine <b>Me1</b> , <b>Me3</b> . <b>Me<sub>max</sub></b> is the allowable moment for <b>V</b> .

V : Collision speed Va : Average speed



## Calculation Example

### Operating Conditions

Cylinder: CY1H15  
 Cushion: Standard (Adjusting bolt)  
 Mounting: Horizontal wall mounting  
 Speed (average): Va = 300 [mm/s]  
 Load mass: W = 1 [kg] (excluding mass of arm section)  
 L1 = 50 [mm]  
 L2 = 50 [mm]

Item	Load factor $\alpha_n$	Note
<b>1 Maximum load mass</b> 	$\alpha_1 = W/W_{max}$ = 1/9 = <b>0.111</b>	Examine <b>W</b> . Find the value of <b>W<sub>max</sub></b> when <b>Va = 300 mm/s</b> from Graph (1).
<b>2 Static moment</b> 	$M_2 = W \cdot L_1$ = 10 · 0.05 = 0.5 [N·m] $\alpha_2 = M_2/M_2 \text{ max}$ = 0.5/16 = <b>0.031</b>	Examine <b>M2</b> . Since <b>M1</b> & <b>M3</b> are not generated, investigation is unnecessary. Find the value <b>M2 max</b> when <b>Va = 300 mm/s</b> from Graph (3).
<b>3 Dynamic moment</b> 	From <b>V = 1.4 Va</b> $We = \delta \cdot W \cdot V$ = 4/100 · 10 · 1.4 · 300 = 168 [N] $Me_3 = 1/3 \cdot We (L_2 - A)$ = 1/3 · 168 · 0.032 = 1.8 [N·m] $\alpha_3 = Me_3/Me_3 \text{ max}$ = 1.8/7.2 = <b>0.250</b>	Examine <b>Me3</b> . Find the load equivalent to impact <b>We</b> . Damper coefficient $\delta = 4/100$ (urethane damper) Find the value of <b>Me3 max</b> when <b>V = 1.4</b> and <b>Va = 420 mm/s</b> from Graph (2).
	$Me_1 = 1/3 \cdot We \cdot L_1$ = 1/3 · 168 · 0.05 = 2.8 [N·m] $\alpha_4 = Me_1/Me_1 \text{ max}$ = 2.8/7.2 = <b>0.389</b>	Examine <b>Me1</b> . From above, <b>We = 168</b> Find the value of <b>Me3 max</b> when <b>V = 1.4</b> and <b>Va = 420 mm/s</b> from Graph (2).

$$\begin{aligned} \Sigma\alpha_n &= \alpha_1 + \alpha_2 + \alpha_3 + \alpha_4 \\ &= 0.111 + 0.031 + 0.250 + 0.389 \\ &= 0.781 \end{aligned}$$


Can be used based on  $\Sigma\alpha_n = 0.781 \leq 1$

## Caution on Design (2)

### Table Deflection Note)


#### Table Displacement due to Pitch Moment Load

Displacement of Section A when force acts on Section F




$$M1 = F \times L$$

#### CY1H10




#### Table Displacement due to Roll Moment Load

Displacement of Section A when force acts on Section F




$$M2 = F \times L$$

#### CY1H10




#### Table Displacement due to Yaw Moment Load

Displacement of Section A when force acts on Section F




$$M3 = F \times L$$


#### CY1H10




#### CY1H15/20/25




#### CY1H15/20/25




#### CY1H15/20/25




#### CY1HT25/32



#### CY1HT25/32



#### CY1HT25/32



Note) Indicates the displacement (rigidity) on the slide table from the position where the reaction force is generated when the torque is applied to the slide table. (Reference values)

### Vertical Operation

When using in vertical operation, prevention of workpiece dropping due to breaking of the magnetic coupling should be considered. The allowable load mass and maximum operating pressure should be as shown in the table below. When the cylinder is mounted vertically or sidelong, sliders may move downwards due to the self-weight or workpiece mass. If an accurate stopping position is required at the stroke end or the middle-stroke, use an external stopper to secure accurate positioning.

Model	Allowable load mass (Wv) (kg)	Maximum operating pressure Pv (MPa)
CY1H10	2.7	0.55
CY1H15	7.0	0.65
CY1H20	11.0	0.65
CY1H25	18.5	0.65
CY1HT25	18.5	0.65
CY1HT32	30.0	0.65

### Intermediate Stop

#### (1) Intermediate Stopping of Load with External Stopper, etc.

When stopping a load in mid-stroke using an external stopper, etc., operate within the operating pressure limits shown in the table below. The magnetic coupling will break if operated at a pressure exceeding these limits.

Model	Operating pressure limit for intermediate stop Ps (MPa)
CY1H10	0.55
CY1H15	0.65
CY1H20	0.65
CY1H25	0.65
CY1HT25	0.65
CY1HT32	0.65

#### (2) Intermediate Stopping of Load with Air Pressure Circuit

When stopping a load using an air pressure circuit, operate at or below the kinetic energy shown in the table below. The magnetic coupling will break if the allowable value is exceeded.

Model	Allowable kinetic energy for intermediate stop Es (J)
CY1H10	0.03
CY1H15	0.13
CY1H20	0.24
CY1H25	0.45
CY1HT25	0.45
CY1HT32	0.88

# Magnetically Coupled Rodless Cylinder Linear Guide Type

# CY1H Series

Single axis:  $\varnothing 10, \varnothing 15, \varnothing 20, \varnothing 25$ /Double axis:  $\varnothing 25, \varnothing 32$



## How to Order

**CY1H**    **25**    - **300**    - **Y7BW**    -   

**Linear guide type**   

**Guide**

Bore size (mm)	10	15	20	25	32
Symbol	10	15	20	25	32
Nil	1 axis	●	●	●	—
T	2 axis	—	—	●	●

**Bore size**

10	10 mm
15	15 mm
20	20 mm
25	25 mm
32	32 mm

**Port thread type**

Symbol	Type	Bore size
Nil	M thread	$\varnothing 10, \varnothing 15$
	Rc	
TN	NPT	$\varnothing 20, \varnothing 25, \varnothing 32$
TF	G	

**Standard stroke (mm)**

Refer to "Standard Stroke" on page 1243.

**Made to Order**  
Refer to page 1243 for details.

**Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

**Auto switch**

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

\* For the applicable auto switch model, refer to the table below.

**Adjustment type**

Nil	With adjusting bolt
B	With shock absorbers (2 pcs.)
BS	With shock absorber (1 pc. on port side)

\* The adjusting bolt is installed even when B or BS is selected. (Except  $\varnothing 10$ )

## Shock Absorbers

Model	Type	Bore size (mm)				
		10	15	20	25	32
CY1H	Standard (shock absorber RB series)	RB0805	RB0806	RB1006	RB1411	—
	Shock absorber soft type RJ series type (-XB22)	RJ0806H		RJ1007H	RJ1412H	—
CY1HT	Standard (shock absorber RB series)	—	—	—	RB1411	RB2015
	Shock absorber soft type RJ series type (-XB22)	—	—	—	RJ1412H	—

\* The shock absorber service life is different from that of the CY1H cylinder.

Refer to "Specific Product Precautions" for each shock absorber for the replacement period.

\* The shock absorber soft type RJ series type (-XB22) is a made to order specification. For details, refer to page 1468.

## Applicable Auto Switches

Refer to pages 1289 to 1383 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)*	Pre-wired connector	Applicable load		
					DC	AC	Electrical entry direction	Electrical entry direction			IC circuit	Relay, PLC	
					Perpendicular	In-line	0.5 (Nil)	3 (L) 5 (Z)					
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	24 V	—	Y69A	Y59A	●	●	○	IC circuit	
				3-wire (PNP)			5 V, 12 V	Y7PV	Y7P	●	●		○
				2-wire			12 V	Y69B	Y59B	●	●		○
	Diagnostic indication (2-color indicator)			3-wire (NPN)	5 V, 12 V	Y7NWX	Y7NW	●	●	○	IC circuit		
				3-wire (PNP)		Y7PWX	Y7PW	●	●	○			
				2-wire		12 V	Y7BWX	Y7BW	●	●		○	
Water resistant (2-color indicator)	—	—	—	—	—	—	Y7BA**	—	●	○	—		
Reed auto switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	Z76	●	●	—	IC circuit	
				2-wire	24 V	12 V	100 V	—	Z73	●	●	●	—
—	—	—	—	—	5 V, 12 V	100 V or less	—	Z80	●	●	—	IC circuit	

\*\* Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

\* Lead wire length symbols: 0.5 m..... Nil (Example) Y7BW  
3 m..... L (Example) Y7BWL  
5 m..... Z (Example) Y7BWZ

\* Solid state auto switches marked with "○" are produced upon receipt of order.

• For details about auto switches with pre-wired connector, refer to pages 1358 and 1359.

• Normally closed (NC = b contact) solid state auto switches (D-Y7G/Y7H types) are also available. Refer to page 1310 for details.

• Auto switches are shipped together, (but not assembled).

**Symbol**

Rubber bumper  
(Magnet type)



**Made to Order: Individual Specifications**  
(For details, refer to pages 1252.)

Symbol	Specifications
-X168	Helical insert thread specifications

**Made to Order Specifications**

[Click here for details](#)

Symbol	Specifications
-XB10	Intermediate stroke (Using exclusive bolt)
-XB11	Long stroke
-XB22	Shock absorber soft type RJ series type

**Theoretical Output**

Bore size (mm)	Piston area (mm <sup>2</sup> )	Operating pressure (MPa)					
		0.2	0.3	0.4	0.5	0.6	0.7
10	78	15	23	31	39	46	54
15	176	35	52	70	88	105	123
20	314	62	94	125	157	188	219
25	490	98	147	196	245	294	343
32	804	161	241	322	402	483	563


(N)

Note) Theoretical output (N) = Pressure (MPa) x Piston area (mm<sup>2</sup>)

**Amount of Adjustment by Adjusting Bolt**

Stroke adjustment on one side of 15 mm (CY1H10/15/20) or 30 mm (CY1H25, CY1HT25, CY1HT32) can be performed with the adjustment bolt, but when the amount of adjustment exceeds 3 mm, the magnetic coupling may be broken depending on the operating conditions. Therefore, operation should conform to the intermediate stop conditions on page 1241.

Do not adjust strokes by moving the stopper, as this can cause cylinder damage.



Model	Stroke adjustment range L (mm)
CY1H10, CY1H15, CY1H20	0 to 15
CY1H25, CY1HT25, CY1HT32	0 to 30

**Specifications**

Bore size (mm)	10	15	20	25	32
<b>Fluid</b>	Air				
<b>Action</b>	Double acting				
<b>Maximum operating pressure</b>	0.7 MPa				
<b>Minimum operating pressure</b>	0.2 MPa				
<b>Proof pressure</b>	1.05 MPa				
<b>Ambient and fluid temperature</b>	-10 to 60°C (No freezing)				
<b>Piston speed</b>	70 to 500 mm/s				
<b>Cushion (External stopper)</b>	Urethane bumpers on both ends (Standard), Shock absorber (Option)				
<b>Lubrication</b>	Not required (Non-lube)				
<b>Stroke length tolerance</b>	0 to 1.8 mm				
<b>Holding force (N)</b>	53.9	137	231	363	588
<b>Piping</b>	Centralized piping type				
<b>Piping port size</b>	M5 x 0.8		Rc 1/8		

**Standard Stroke**

Bore size (mm)	Number of axes	Standard stroke (mm) Note)	Maximum available stroke (mm)
10	1 axis	100, 200, 300	500
15		100, 200, 300, 400, 500	750
20		100, 200, 300, 400, 500, 600	1000
25		100, 200, 300, 400, 500, 600, 800	1200
25	2 axis	100, 200, 300, 400, 500, 600, 800, 1000	
32		1500	

Note) Strokes are manufacturable in 1 mm increments up to the maximum strokes. Suffix "XB10" to the end of the part number for intermediate strokes excluding standard strokes and "XB11" for strokes exceeding standard strokes up to the manufacturable maximum strokes.

**Weight**

Model	Standard stroke (mm)								(kg)
	100	200	300	400	500	600	800	1000	
CY1H10	1.0	1.3	1.6	—	—	—	—	—	—
CY1H15	2.2	2.7	3.2	3.6	4.1	—	—	—	—
CY1H20	3.0	3.5	4.0	4.4	4.9	5.4	—	—	—
CY1H25	4.6	5.3	6.0	6.6	7.3	8.0	9.4	—	—
CY1HT25	5.1	6.2	7.3	8.3	9.4	10.4	12.5	14.6	—
CY1HT32	8.4	9.6	10.7	11.9	13.0	14.2	16.5	18.8	—

**Shock Absorber Specifications**

Refer to the RB series in the [Web Catalog](#) for the details on shock absorbers.

Applicable cylinder size (mm)	10	15	20	25	32
<b>Shock absorber model</b>	RB0805	RB0806	RB1006	RB1411	RB2015
<b>Maximum energy absorption (J)</b>	0.98	2.94	3.92	14.7	58.8
<b>Stroke absorption (mm)</b>	5	6	6	11	15
<b>Collision speed (m/s) *</b>	0.05 to 5				
<b>Max. operating frequency (cycle/min)</b>	80		70		45
<b>Spring force (N)</b>	<b>Extended</b>		1.96		4.22
	<b>Retracted</b>		3.83		22
<b>Weight (g)</b>	15		25		65


\* It denotes the values at the maximum energy absorption per one cycle. Therefore, the operating frequency can be increased according to the energy absorption.

The shock absorber service life is different from that of the CY1H cylinder. Refer to the Specific Product Precautions for the replacement period.

# CY1H Series

Construction <sup>Note)</sup>

## Single axis type / CY1H

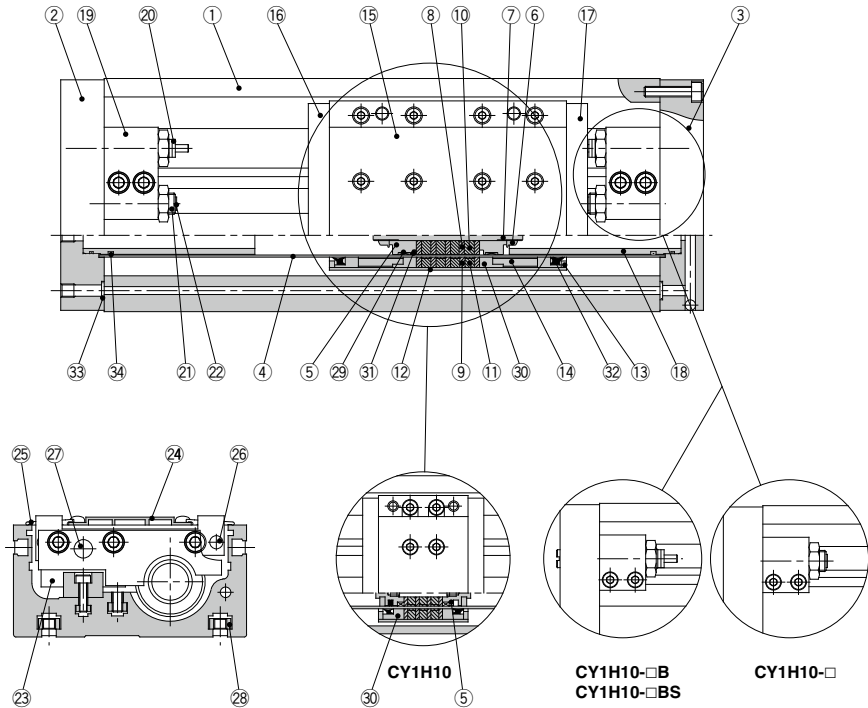

### Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Plate A	Aluminum alloy	Anodized
3	Plate B	Aluminum alloy	Anodized
4	Cylinder tube	Stainless steel	
5	Piston	Aluminum alloy	Chromated
6	Piston nut	Carbon steel	Zinc chromated (Except CY1H10/15)
7	Shaft	Stainless steel	
8	Piston side yoke	Rolled steel plate	Zinc chromated
9	External slider side yoke	Rolled steel plate	Zinc chromated
10	Magnet A	—	
11	Magnet B	—	
12	External slider tube	Aluminum alloy	
13	Spacer	Rolled steel plate	Nickel plated
14	Space ring	Aluminum alloy	Chromated (Except CY1H10)
15	Slide table	Aluminum alloy	Anodized
16	Side plate A	Aluminum alloy	Anodized
17	Side plate B	Aluminum alloy	Anodized
18	Internal stopper	Aluminum alloy	Anodized
19	Stopper	Aluminum alloy	Anodized
20	Shock absorber	—	RB series
21	Adjusting bolt	Chrome molybdenum steel	Nickel plated
22	Adjusting bumper	Urethane rubber	
23	Linear guide	—	
24	Top cover	Aluminum alloy	Anodized
25	Dust cover	Special resin	
26	Magnet (For auto switch)	—	

No.	Description	Material	Note
27	Parallel pin	Carbon steel	Nickel plated
28	Square nut for body mounting	Carbon steel	Nickel plated
29*	Wear ring A	Special resin	
30*	Wear ring B	Special resin	
31*	Piston seal	NBR	
32*	Scraper	NBR	
33*	O-ring	NBR	
34*	O-ring	NBR	

Note) 4 square nuts for body mounting are included regardless of strokes.

### Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Contents
10	CY1H10-PS	Set of the above nos. 29, 30, 31, 32, 33, 34
15	CY1H15-PS	Set of the above nos. 29, 30, 31, 32, 33, 34
20	CY1H20-PS	
25	CY1H25-PS	

Note 1) Seal kit includes 29 to 34. Order the seal kit, based on each bore size.

Note 2) For bore size  $\phi 10$ , wear ring A cannot be replaced.

\* Seal kit includes a grease pack ( $\phi 10$ : 5 and 10 g,  $\phi 15$  to  $\phi 25$ : 10 g).

Order with the following part number when only the grease pack is needed.

Grease pack part no. for  $\phi 10$ : GR-F-005 (5 g) for external sliding parts,


GR-S-010 (10 g) for tube interior

Grease pack part no. for  $\phi 15$  to  $\phi 25$ : GR-S-010 (10 g)



**Construction**

**Double axis type / CY1HT**

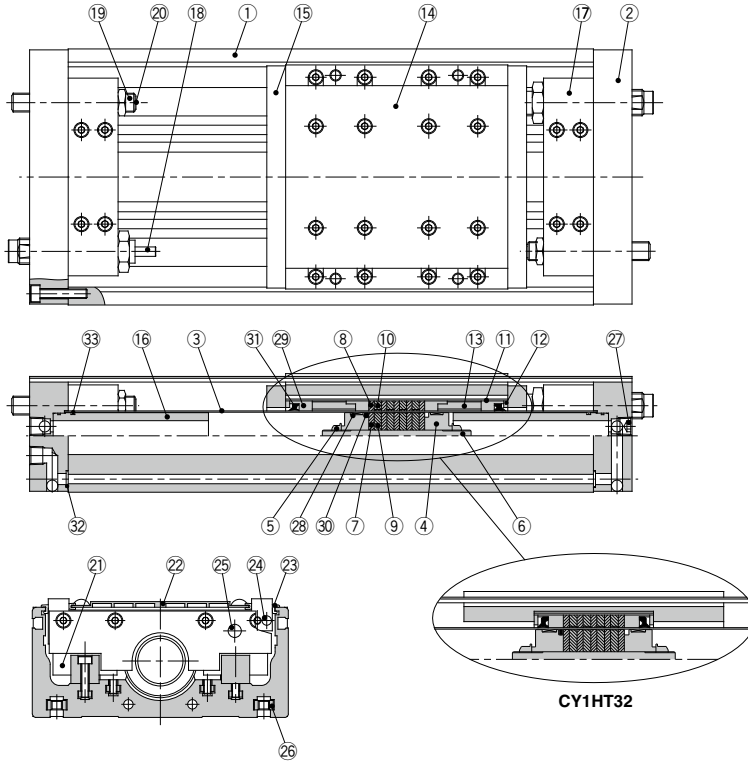

**Component Parts**

No.	Description	Material	Material
1	Body	Aluminum alloy	Anodized
2	Plate	Aluminum alloy	Anodized
3	Cylinder tube	Stainless steel	
4	Piston	Aluminum alloy	Chromated
5	Piston nut	Carbon steel	Zinc chromated
6	Shaft	Stainless steel	
7	Piston side yoke	Rolled steel plate	Zinc chromated
8	External slider side yoke	Rolled steel plate	Zinc chromated
9	Magnet A	—	
10	Magnet B	—	
11	External slider tube	Aluminum alloy	
12	Spacer	Rolled steel plate	Nickel plated
13	Space ring	Aluminum alloy	Chromated (Except CY1HT32)
14	Slide table	Aluminum alloy	Anodized
15	Side plate	Aluminum alloy	Anodized (Except CY1HT32)
16	Internal stopper	Aluminum alloy	Anodized
17	Stopper	Aluminum alloy	Anodized
18	Shock absorber	—	RB series
19	Adjusting bolt	Chrome molybdenum steel	Nickel plated
20	Adjusting bumper	Urethane rubber	
21	Linear guide	—	
22	Top cover	Aluminum alloy	Anodized
23	Dust cover	Special resin	
24	Magnet (For auto switch)	—	
25	Parallel pin	Stainless steel	

No.	Description	Material	Material
26	Square nut for body mounting	Carbon steel	Nickel plated
27	Hexagon socket head taper plug	Carbon steel	Nickel plated
28*	Wear ring A	Special resin	
29*	Wear ring B	Special resin	
30*	Piston seal	NBR	
31*	Scraper	NBR	
32*	O-ring	NBR	
33*	O-ring	NBR	

Note) 4 square nuts for body mounting are included regardless of strokes.

**Replacement Parts: Seal Kit**

Bore size (mm)	Kit no.	Contents
25	CY1HT25-PS	Set of the above nos.
32	CY1HT32-PS	28, 29, 30, 31, 32, 33


\* Seal kit includes 28 to 33. Order the seal kit, based on each bore size.  
 \* Seal kit includes a grease pack (10 g).  
 Order with the following part number when only the grease pack is needed.  
**Grease pack part no. : GR-S-010 (10 g)**

# CY1H Series

## Dimensions

### Single axis type / $\varnothing 10$


#### CY1H10

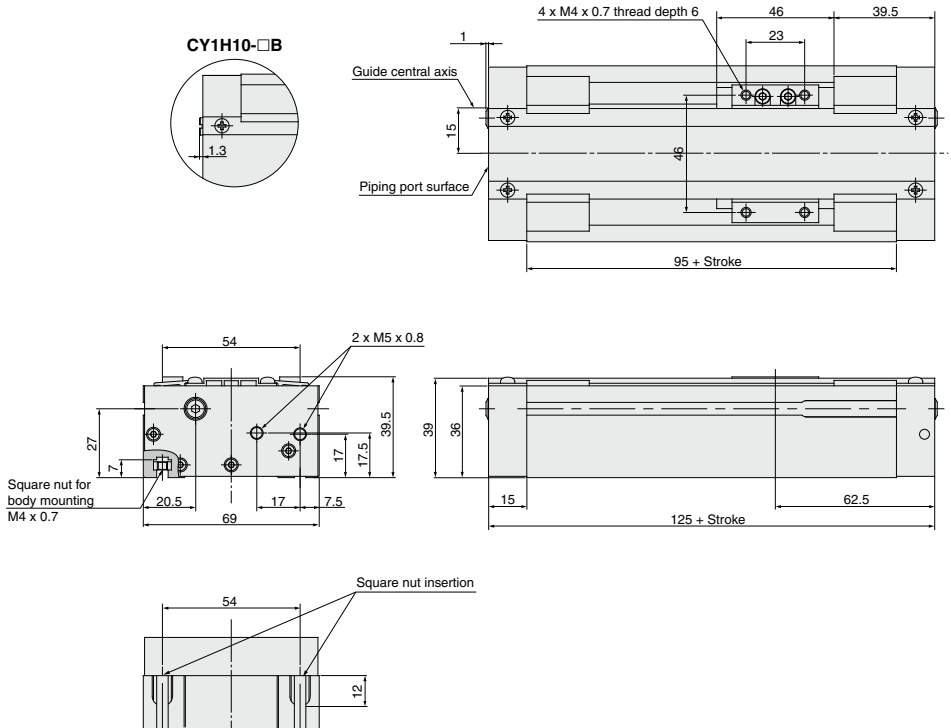

**Dimensions**

**Single axis type /  $\varnothing 15, \varnothing 20, \varnothing 25$**

**CY1H15/20/25**

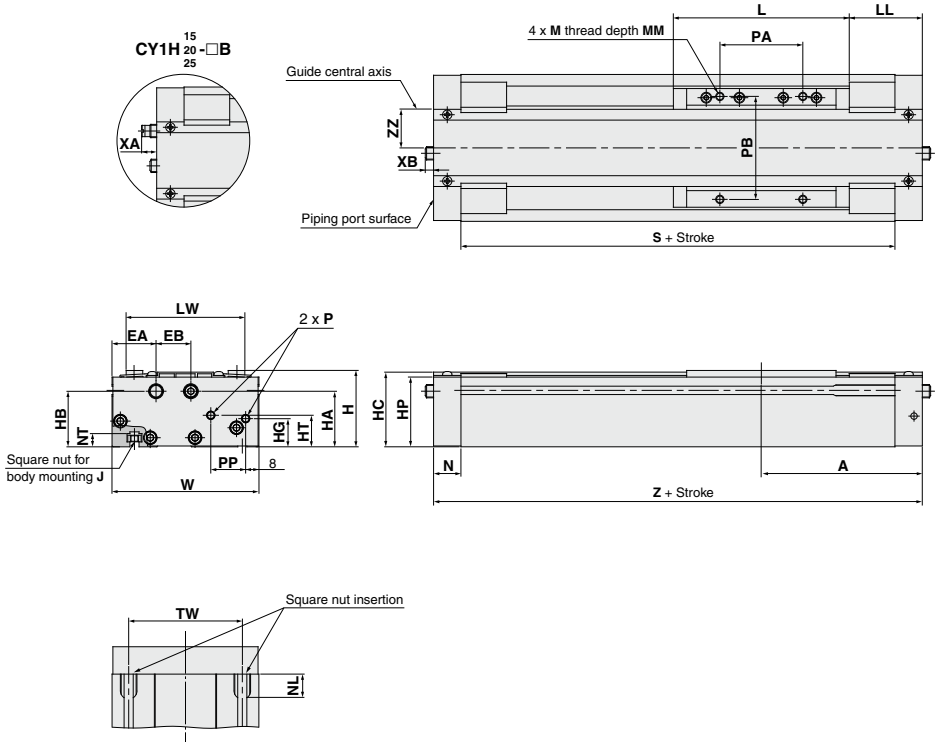

(mm)

Model	A	EA	EB	H	HA	HB	HC	HG	HP	HT	J	L	LL	LW	M	MM	N	NL	NT
CY1H15	97	26.5	21	46	33.5	33.5	45	17	42	19	M5 x 0.8	106	44	71.5	M5 x 0.8	8	16.5	15	8
CY1H20	102.5	26.5	22	54	42.5	41.5	53	16	50	23.5	M5 x 0.8	108	48.5	75.5	M5 x 0.8	8	18	15	8
CY1H25	125	29	24	63	46	46	61.5	25	58.5	28	M6 x 1.0	138	56	86	M6 x 1.0	10	20.5	18	9


Model	P	PA	PB	PP	S	TW	W	XA	XB	Z	ZZ
CY1H15	M5 x 0.8	50	62	21	161	65	88.5	—	—	194	17.5
CY1H20	Rc1/8	50	65	23	169	70	92.5	—	—	205	19.5
CY1H25	Rc1/8	65	75	27	209	75	103	11.3	9.5	250	23.5

# CY1H Series

## Dimensions

### Double axis type: / $\varnothing 25$ , $\varnothing 32$

#### CY1HT25/32

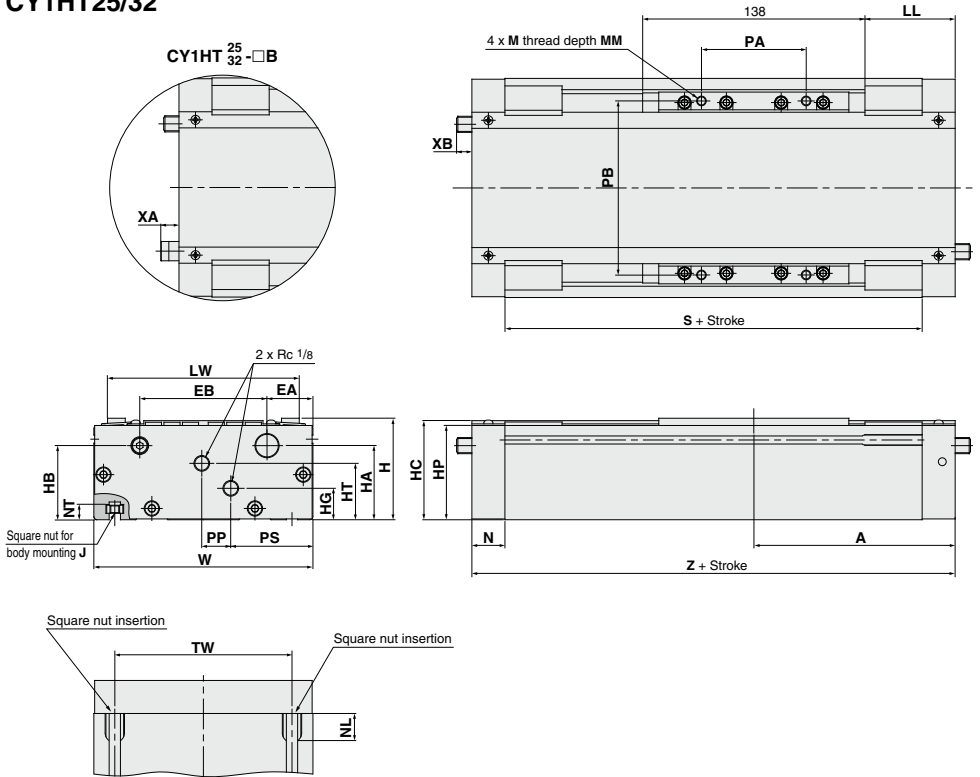

(mm)


Model	A	EA	EB	H	HA	HB	HC	HG	HP	HT	J	LL	LW	M	MM	N	NL	NT	PA
<b>CY1HT25</b>	125	28.5	79	63	46	46	61.5	19.5	58.5	35	M6 x 1.0	56	119	M6 x 1.0	10	20.5	18	9	65
<b>CY1HT32</b>	132.5	30	90	75	52.5	57.5	72.5	25	69.5	43	M8 x 1.25	63.5	130	M8 x 1.25	12	23	22.5	12	66

Model	PB	PP	PS	S	TW	W	XA	XB	Z
<b>CY1HT25</b>	108	18	51	209	110	136	11.3	9.5	250
<b>CY1HT32</b>	115	14	61	219	124	150	9.7	2	265

# CY1H Series Auto Switch Mounting

## Proper Auto Switch Mounting Position (Detection at stroke end)




Cylinder model	Applicable auto switch	
	D-Z7□/ Z80/ Y5□/ Y6□/ Y7□	
	A	B
CY1H10	65.5	59.5
CY1H15	72	122
CY1H20	77.5	127.5
CY1H25	86	164
CY1HT25	86	164
CY1HT32	82	183

\* 50 mm is the minimum stroke available with 2 auto switches mounted.

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.

## Mounting of Auto Switch

To install the auto switch, insert the auto switch into the installation groove of the cylinder from the direction shown in the drawing on the right, and tighten the auto switch mounting screws attached to the auto switch with a watchmaker's screwdriver after setting the mounting position.




Note) Use a watchmaker's screwdriver with a grip diameter of 5 to 6 mm to tighten the auto switch mounting screws (attached to the auto switch).

The tightening torque should be 0.05 to 0.1 N•m.

## Auto Switch Lead Wire Containment Groove

On models CY1H20 and CY1H25 a groove is provided on the side of the body (one side only) to contain auto switch lead wires. This should be used for management of wiring.

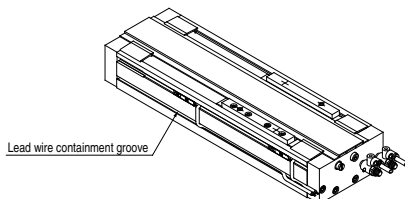

## Operating Range

Cylinder model	Auto switch model	Bore size (mm)				
		10	15	20	25	32
CY1H	D-Z7□/ Z80	8	6	6	6	—
	D-Y5□/ Y6□/ Y7□	6	5	5	5	—
CY1HT	D-Z7□/ Z80	—	—	—	6	9
	D-Y5□/ Y6□/ Y7□	—	—	—	5	6

\* Some auto switches cannot be mounted.

\* Since this is a guideline including hysteresis, not meant to be guaranteed. (Assuming approximately ±30% dispersion)

There may be the case it will vary substantially depending on an ambient environment.



# CY1H Series Specific Product Precautions 1

Be sure to read this before handling the products. Refer to page 8 for safety instructions and pages 9 to 18 for actuator and auto switch precautions.

## Operation

### ⚠ Warning

1. Be aware of the space between the plates and the slide block.

Take sufficient care to avoid getting your hands or fingers caught when the cylinder is operated.

2. Do not apply a load to a cylinder which is greater than the allowable value stated in the "Model Selection" pages.

This may cause malfunctions.

3. Consider a special order product if the cylinder is to be used in an environment that deteriorates the lubrication of the cylinder sliding parts.

4. When applying grease to the cylinder, use the grease that has already been applied to the product. Grease packs are available if needed.

### ⚠ Caution

1. The unit can be used with a direct load within the allowable range, but when connecting to a load which has an external guide mechanism, careful alignment is necessary.

Since variation of the shaft center increases as the stroke becomes longer, a connection method should be devised which allows for this displacement.

2. Since the guide is adjusted at the time of shipment, unintentional movement of the adjustment setting should be avoided.

3. This unit can be operated without lubrication. If lubrication is performed, use turbine oil Class 1 (with no additives), ISO VG32. (Machine oil and spindle oil cannot be used.)

4. Do not use the cylinder in an environment where the cylinder is exposed to moisture, adhesive foreign matter, dust or liquid such as water or cutting fluid.

Consider a special order product if the cylinder is to be used in an environment that deteriorates the lubrication of the cylinder sliding parts.

5. Do not operate with the magnetic coupling out of position.

In case the magnetic coupling is out of position, push the external slider back into the correct position by hand at the end of the stroke (or correct the piston slider with air pressure).

6. Do not disassemble the magnetic components (piston slider, external slider).

This can cause a loss of holding power and malfunction.

## Mounting

### ⚠ Caution

1. The interior is protected to a certain extent by the top cover, however, when performing maintenance, etc., take care not to cause scratches or other damage to the cylinder tube, slide table or linear guide by striking them or placing objects on them.


Cylinder bores are manufactured to precise tolerances, so that even a slight deformation may cause faulty operation.

2. Because the slider is supported by precision bearings, take care not to apply strong impacts or excessive moments to the table when loading a workpiece.

3. Mounting of the cylinder body

The body is mounted using the square nuts, which are included, in the two T-slots on the bottom of the body. Refer to the table below for mounting bolt dimensions and tightening torque.

Model		CY1H10	CY1H15	CY1H20	CY1H25	CY1HT25	CY1HT32
Bolt dimensions	Thread size	M4 x 0.7	M5 x 0.8		M6 x 1.0		M8 x 1.25
	Dimension t	L-7	L-8	L-8	L-9		L-12
Tightening torque	N · m	1.37	2.65		4.4		13.2



## Service Life and Replacement Period of Shock Absorber

### ⚠ Caution

1. Allowable operating cycle under the specifications set in this catalog is shown below.

1.2 million times RB08□□

2 million times RB10□□ to RB2725

Note) Specified service life (suitable replacement period) is the value at room temperature (20 to 25°C).

The period may vary depending on the temperature and other conditions. In some cases the absorber may need to be replaced before the allowable operating cycle above.




# CY1H Series Specific Product Precautions 2

Be sure to read this before handling the products. Refer to page 8 for safety instructions and pages 9 to 18 for actuator and auto switch precautions.

## Stroke Adjustment Method

Loosen the round head Phillips Screws, and remove the top cover and dust covers (4 pcs.).



Loosen the hexagon nut, adjust the stroke with a hexagon wrench from the plate side, and secure by retightening the hexagon nut. When there is a shock absorber, loosen the hexagon nut, adjust the stroke, and then retighten the hexagon nut.

Adjustment should be performed to make effective use of the shock absorber's absorption capacity, with its position relative to the adjustment bolt as shown in the figure to the right.


## ⚠ Caution

1. If the effective stroke of the shock absorber is shortened by the stroke adjustment, its absorption capacity will be drastically reduced. Therefore, the adjusting bolt should be secured at a position where it projects about 0.5 mm farther than the shock absorber.

### Lock Nut Tightening Torque

N·m

Model	For shock absorber	For adjusting bolt
CY1H10	1.67	1.67
CY1H15		
CY1H20	3.14	3.14
CY1H25	10.8	
CY1HT25		
CY1HT32	23.5	



After completing the above adjustment, replace the top cover and dust covers back into place.

The round head Phillips screws for securing the top cover should be tightened with a torque of 0.58 N·m.

# CY1L/H Series

## Made to Order: Individual Specifications

Please contact SMC for detailed dimensions, specifications and lead times.



### Applicable Series

No.	Symbol	Specifications/Description	Slider type	
			Ball bushing type <b>CY1L</b>	High precision guide type <b>CY1H</b>
1	-X116	Hydro specifications	●(ø25 to ø40)	—
2	-X168	Helical insert thread specifications	●(ø20 to ø40)	●(ø20 to ø32)
3	-X322	Outside of cylinder tube with hard chrome plated	●(ø15 to ø40)	—
4	-X431	Auto switch rails on both side faces (With 2 pcs.)	●(ø6 to ø40)	—

### 1 Hydro Specifications **-X116**

This type is applicable for precision constant speed feed, intermediate stop and skip feed.

[Slider type]


CY1L **Bore size** **Magnetic holding force** - **Stroke** **Damper type** - **Switch** - X116  
 Hydro specifications

### Specifications

Type	Slider type
<b>Bore size</b>	Slider type CY1L25 to 40
<b>Fluid</b>	Turbine oil
<b>Piston speed</b>	15 to 300 mm/s

Note) Piping is from each plate on both sides.

### Dimensions

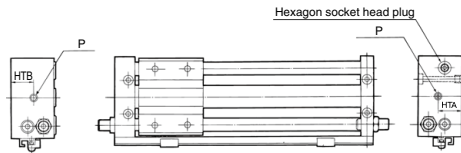

Model	HTA	HTB	P	Throttle dia.
CY1L25	20	23	Rc 1/8	8.2
CY1L32	24	26.5	Rc 1/8	8.2
CY1L40	25	30.5	Rc 1/4	11

(mm)

\* Dimensions other than the above are the same as the standard type.

### 2 Helical Insert Thread Specifications **-X168**

CY1L **Bore size** **Magnetic holding force** - **Stroke** - X168  
 CY1H Helical insert thread specifications

Helical insert thread is used for standard mounting thread.

### Specifications

Applicable Series	CY1L/CY1H
<b>Bore size</b>	CY1L: ø20 to ø40 CY1H: ø20 to ø32

### 3 Outside of Cylinder Tube with Hard Chrome Plated **-X322**

CY1L **Bore size** **Magnetic holding force** - **Stroke** - X322  
 Outside of cylinder tube with hard chrome plated

The cylinder tube outer circumference is plated with hard chrome, which further reduces bearing abrasion.


Note) The slider type (slide block) is provided with a greasing port.

### Specifications

Applicable Series	Bore size (mm)
CY1L	ø15 to ø40

### Construction/Dimensions

#### CY1L (Slider type)



Bore size (mm)	CY1L (mm)	
	NA	HW
15	33.0	37.5
20	38.0	43.0
25	43.0	43.0
32	50.0	50.0
40	61.0	68.0



Symbol


**4 Auto Switch Rails on Both Side Faces (With 2 pcs.)**

**-X431**

CY1L Bore size Magnetic holding force — Stroke — X431

Auto switch rails on both side faces (With 2 pcs.)

This auto switch is effective in the case of short strokes.



**Specifications**

Applicable Series	<b>CY1L</b>
<b>Bore size</b>	ø6 to ø40

Bore size (mm)	Applicable stroke (mm)
<b>6</b>	20 to
<b>10</b>	25 to
<b>15</b>	
<b>20</b>	
<b>25</b>	
<b>32</b>	35 to
<b>40</b>	